

canair

Made for Quebec

4CDH

R-454B

HIGH EFFICIENCY



CENTRAL HEAT PUMP SYSTEMS

Side Discharge Central System
4CDH Serie



 **-30°C**

Exclusive distributor

 **DESCAIR**


Proud family and Quebec
owned company since 1971

IMPROVED COMFORT MADE EASY




HIGH EFFICIENCY SYSTEM

UP TO 19 SEER2
AND 10.2 HSPF2

COMPACT AND FLEXIBLE FORMAT

A slimmer design and lighter weight than top discharge systems. This system offers unparalleled flexibility to fit any home space.

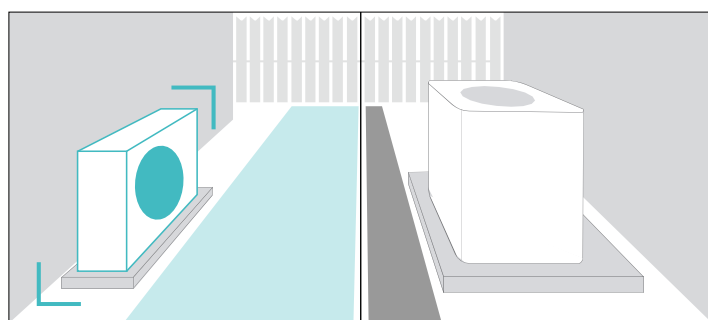

Side discharge
system

Top discharge
system

QUIET OPERATION

Thanks to Inverter technology, which allows for constant and adjustable operation, the system can operate at a significantly lower decibel level than the competition, providing additional acoustic comfort in any environment (indoor or outdoor).

AN ENERGY-EFFICIENT PRODUCT

The intelligent constant airflow fan automatically measures pressure problems caused by blocked coils, dirty filters, etc. The motor responds to these conditions by adjusting power output and fan speeds to ensure optimal airflow. By providing the right amount of airflow, the system can effectively reduce energy waste caused by excessive airflow.

-30°C
HEAT PUMPS



STAYING COZY ON COLD DAYS

Continuous Operation
Down to **-30°C/-22°F**

Up to **100%** Heating
Output at

-20°C/-4°F
With COP Up to **1.8**



A+ FOR PROFESSIONAL USE —

More units in your professional van or truck; 4 or 5 side discharge units instead of 1 or 2 top discharge units. Also, the unit is easy to transport to the installation site and to install on a stand because it can be carried by a single technician.

A+ FOR CONSUMER —


Silent operation for all uses thanks to Inverter technology featuring constant and adjustable operation.

PEACE OF MIND THANKS TO ITS RELIABILITY

BACKYARD



ROOF/TERRACE/BALCONY

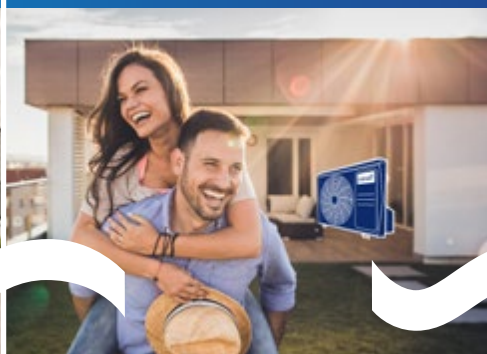

RESTRICTED SPACES



TONS ▾			1.5	2	2.5	
Indoor Unit			4CDH2018F21	4CDH2024F21	4CDH2030F21	
Outdoor Unit			4CDH2018C21	4CDH2024C21	4CDH2030C21	
AHRI Reference Number			215449704	215449705	215449706	
CERTIFICATION						
ENERGY STAR [®]			●	●	●	
ENERGY STAR [®] – Cold Climate V6.1			●	●	●	
EFFICIENCY						
Capacity	Cooling	BTU/hr.	18,000 (5,600 ~ 22,000)	23,000 (7,200 ~ 27,000)	30,000 (12,800 ~ 39,000)	
	Heating	BTU/hr.	19,000 (6,000 ~ 22,000)	24,000 (7,100 ~ 30,000)	34,000 (10,300 ~ 38,500)	
SEER2		BTU/W	19.0	18.3	16.8	
EER2		BTU/W	12.5	11.7	11.7	
HSPF2 IV		BTU/W	9.7	10.0	10.0	
HSPF2 V		BTU/W	8.0	8.0	8.3	
Outdoor Operating Conditions	Cooling	°C	-30 ~ 50	-30 ~ 50	-30 ~ 50	
		°F	-22 ~ 122	-22 ~ 122	-22 ~ 122	
	Heating	°C	-30 ~ 24	-30 ~ 24	-30 ~ 24	
		°F	-22 ~ 75	-22 ~ 75	-22 ~ 75	
Heating at -15°C (5°F)	Rated capacity	BTU/W	18,000	21,600	32,600	
	COP	W/W	2.00	1.87	1.96	
INDOOR UNIT ▾						
ELECTRICAL DATA						
Power Supply		V/ph/Hz	115-208-230 / 1 / 60	115-208-230 / 1 / 60	115-208-230 / 1 / 60	
Min. Circuit Ampacity		A	5.5 / 4.0	5.5 / 4.0	8.0 / 6.0	
Max. Fuse		A	15	15	15	
FEATURES						
Indoor Fan Motor	Model		ZKFD-250-8-1	ZKFD-250-8-1	ZKFD-375-8-1-1	
	RLA	A	2	3	4.5	
Power		HP	1/3 HP	1/2 HP	1/2 HP	
Indoor Airflow	Turbo / Hi / Mi / Lo / Si	CFM	618.0 / 576.8 / 529.7 / 488.5 / n/a	824.0 / 759.3 / 694.5 / 629.8 / n/a	988.8 / 894.7 / 806.4 / 712.2 / n/a	
Indoor Noise Level	Turbo / Hi / Mi / Lo / Si	dB(A)	n/a / 41.0 / 39.0 / 33.0 / n/a	n/a / 44.0 / 42.0 / 28.0 / n/a	47.0 / 46.0 / 43.0 / 27.5 / n/a	
Indoor Static Pressure Range		in.w.g	0-0.8	0-0.8	0-0.8	
DIMENSIONS AND WEIGHT						
Supply Opening	W x D	in	15.63 x 10.24	15.63 x 10.24	19.13 x 10.24	
Dimensions	W x D x H	in	17.52 x 21.02 x 45.00	17.52 x 21.02 x 45.00	21.02 x 21.02 x 49.02	
Net Weight		lbs	105.82	105.60	128.97	
OUTDOOR UNIT ▾						
ELECTRICAL DATA						
Power Supply		V/ph/Hz	208-230 / 1 / 60	208-230 / 1 / 60	208-230 / 1 / 60	
Min. Circuit Ampacity		A	16.0	19.0	29.5	
Max. Fuse		A	20	20	30	
FEATURES						
Outdoor Airflow		CFM	1,765.7	1,765.7	3,001.8	
Outdoor Noise Level	Hi	dB(A)	59.0	60.0	60.5	
Refrigerant			R-454b	R-454b	R-454b	
Refrigerant Charge		oz	74.08	74.08	105.82	
Additional Refrigerant		oz/ft	0.7	0.7	0.7	
Preloaded		ft	24.6	24.6	24.6	
Refrigerant Piping	Liquid & Gas	in	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	
	Max. Piping Length	ft	98.4	164.0	164.0	
	Max. Height Diff.	ft	65.6	82.0	82.0	
Connection Wiring			AWG 20-2	AWG 20-2	AWG 20-2	
DIMENSIONS AND WEIGHT						
Dimensions	W x D x H	in	35.04 x 13.46 x 26.50	35.04 x 13.46 x 26.50	37.24 x 16.14 x 31.89	
Net Weight		lbs	101.41	102.29	164.02	

	3	4	5
	4CDH2036F21	4CDH2048F21	4CDH2060F21
	4CDH2036C21	4CDH2048C21	4CDH2060C21
	215449707	215449708	215449709
	•	•	•
	•	•	•
	36,000 (9,700 ~ 42,000)	48,000 (15,600 ~ 51,000)	54,000 (11,400 ~ 56,300)
	37,000 (11,000 ~ 48,000)	50,000 (15,500 ~ 57,300)	56,000 (8,100 ~ 64,500)
	17.4	16.5	16.0
	11.7	10.5	10.0
	10.2	9.5	9.0
	8.6	8.0	8.0
	-30 ~ 50	-30 ~ 50	-30 ~ 50
	-22 ~ 122	-22 ~ 122	-22 ~ 122
	-30 ~ 24	-30 ~ 24	-30 ~ 24
	-22 ~ 75	-22 ~ 75	-22 ~ 75
	39,000	46,000	52,000
	1.90	1.90	1.80
	115-208-230 / 1 / 60	115-208-230 / 1 / 60	115-208-230 / 1 / 60
	8.0 / 6.0	14.5 / 11.0	14.5 / 11.0
	15	15	15
	ZKFD-375-8-1-1	ZKFD-750-8-1-1	ZKFD-750-8-1-1
	4.5	7.8	8.3
	1/2 HP	3/4 HP	1 HP
	1,189.0 / 1,083.0 / 971.2 / 865.2 / n/a	1,601.0 / 1,471.5 / 1,283.1 / 1,094.8 / n/a	1,807.0 / 1,583.3 / 1,359.7 / 1,136.0 / n/a
	49.0 / 48.0 / 45.5 / 25.5 / n/a	n/a / 52.0 / 50.0 / 34.0 / n/a	54.5 / 52.0 / 49.5 / 34.5 / n/a
	0-0.8	0-0.8	0-0.8
	19.13 x 10.24	22.64 x 10.24	22.64 x 10.24
	21.02 x 21.02 x 49.02	24.49 x 21.02 x 52.99	24.49 x 21.02 x 52.99
	129.41	162.92	162.92
	208-230 / 1 / 60	208-230 / 1 / 60	208-230 / 1 / 60
	29.0	38.0	40.0
	30	40	40
	3,001.8	3,037.1	2,648.6
	62.5	65.0	65.0
	R-454b	R-454b	R-454b
	126.99	134.04	183.42
	0.7	0.7	0.7
	24.6	24.6	24.6
	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4
	246.0	246.0	246.0
	98.4	98.4	98.4
	AWG 20-2	AWG 20-2	AWG 20-2
	38.58 x 16.34 x 38.39	38.58 x 16.34 x 38.39	37.48 x 16.34 x 52.48
	204.15	201.06	242.95



INDOOR UNIT



OUTDOOR UNITS



1.5 T to 4 T



5 T

WI-FI WIRED CONTROLLER (included)



One of the most compatible systems in its category.



Comfort in all conditions, comfort in every room.



Pleasantly reliable and surprisingly affordable.

**EASY TO INSTALL,
TO USE AND PROFITABLE**
THANKS TO THE ECM MOTOR



EASY MAINTENANCE AIR HANDLING UNIT

5 kW

10 kW

15 kW

20 kW

25 kW

INDOOR UNIT FEATURES

- Multi-position (up/down/left/right)
- Constant air flow system up to 0.8 in.w.g
- Aluminium coil
- Optional auxiliary heat kit up to 25 kW
- Electronic expansion valve included
- 115 / 230V compatible
- Integrated A2L refrigerant leak detection system (R-454b)

SIMPLIFIED MAINTENANCE

The sliding top cover is easy to remove.

ELECTRICAL COMPONENTS

Just two integrated printed circuit boards (PCB). The first board is the main control board; the second is a functional board for the 24V thermostat, DIP switch, cable control and 88 LED display. High efficiency manufacturing, easy maintenance, cables joined using a connector.

FILTER


Simplified filter maintenance.

ELECTRIC HEATING UNIT

Just one piece. High efficiency manufacturing, simplified installation and maintenance.

MODULAR SLIDING EVAPORATOR

The evaporator coil has a modular design that can be easily removed for maintenance by the user thanks to the sliding feature. It's easy to remove and can be set up to meet the specific needs of different installation spaces.

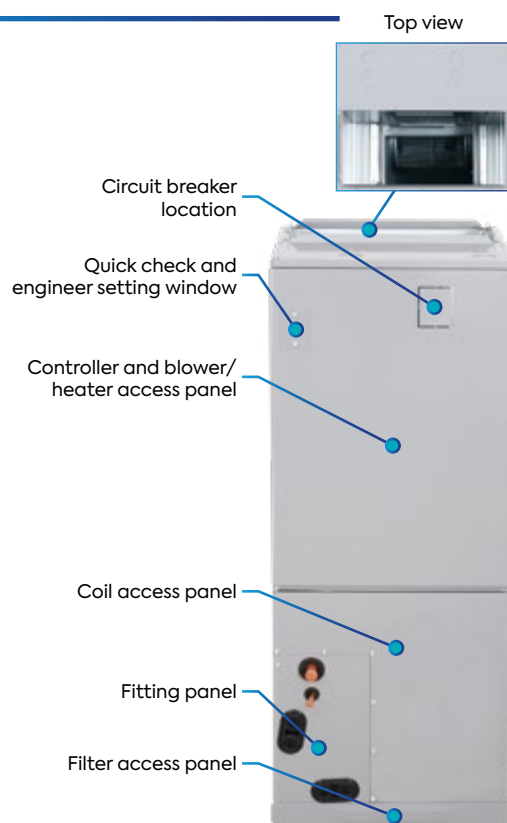

FEATURES



HEATING AND COOLING UP TO -30°C

A heat pump designed to give you optimum efficiency and performance in heating and cooling.



SELF-CLEANING FEATURE

To clean and dry the indoor and outdoor coil for the prevention of mould and mildew.



“FOLLOW ME” FEATURE

For maintaining the temperature wherever the remote control is located.



DRAFT STOPPER FEATURE

For a nice warm sensation when starting the unit in heating mode.



AUTOMATIC RESTART

As soon as service is restored following a power failure, while maintaining the previously selected settings.



OUTDOOR HEAT CABLES

Installed at the base of the outdoor unit, but also around the compressor to prevent ice build-up and ensure a smooth start-up.



A2L REFRIGERANT LEAKAGE DETECT

Indoor unit will show error code .ec. and stops automatically when refrigerant leakage is detected.



WI-FI CONNECTIVITY WITH WIRED CONTROLLER

This non-polarity controller, equipped with an infrared receiver, allows you to control all functions.



SELF-DIAGNOSIS AND AUTO-PROTECTION

Once abnormal operation or parts failure happen, the unit will shut off automatically to protect the system. Meanwhile it will indicate protection or error code for fast service.



EMERGENCY USAGE

When temperature sensor error happens, the air conditioner will display error code and stop immediately, while Canair AC will display error and continue running in a proper status, to avoid an urgent need of the AC.



AUTO-DEFROST

Prevent evaporator from freezing and maintain dehumidifying under low temperature environment.



SIMPLIFIED INSTALLATION AND MAINTENANCE

Thanks to its compact and lightweight design, this heat pump fits easily into a variety of spaces.



QUIET SYSTEM

The indoor unit's variable-speed system operates at a lower decibel level than the competition.

ELECTRICAL ELEMENTS

AMPERAGE ELECTRICAL ELEMENTS 208/230V													
		#1 CIRCUIT			#2 CIRCUIT			#3 CIRCUIT			TOTAL		
Model	kW	AMP	MCA	MOP	AMP	MCA	MOP	AMP	MCA	MOP	AMP	MCA	MOP
EAH-05E(UL)	5	18	23	30							18	23	30
EAH-10E(UL)	10	36	46	60							36	46	60
EAH-15E(UL)	15	18	23	30	36	46	60				54	69	90
EAH-20E(UL)	20	36	46	60	36	46	60				72	92	120
EAH-25E(UL)	25	18	23	30	36	46	60	36	46	60	90	115	150

CASED A-COILS

TONS •			1.5	1.5	2	2	2.5
MODEL •			CEB-24MX1421	CEB-24MX1721	CEB-24MX1421	CEB-24MX1721	CEB-36MX1421
Compatible Outdoor Unit			4CDH2018C21	4CDH2018C21	4CDH2024C21	4CDH2024C21	4CDH2030C21
AHRI Reference Number			216621485	216621486	216621487	216621488	216621489
CERTIFICATION							
ENERGY STAR®			●	●	●	●	●
ENERGY STAR® – Cold Climate V6.1			●	●	●	●	●
EFFICIENCY							
Capacity	Cooling	BTU/hr.	18,000	18,000	24,000	24,000	30,000
	Heating	BTU/hr.	19,000	19,000	25,000	25,000	32,000
SEER2		BTU/W	16.1	16.1	16.0	16.0	15.3
HSPF2 IV		BTU/W	9.5	9.5	9.5	9.5	9.3
HSPF2 V		BTU/W	7.8	7.8	7.0	7.0	7.7
Heating at -15°C (5°F)	Rated capacity	BTU/W	18,000	18,000	21,000	21,000	30,400
	COP	W/W	2.06	2.06	1.80	1.80	1.80
Indoor Coil	Type of fins		Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum
Regulator Type			VET	VET	VET	VET	VET
Drain Pipe Outdoor Diameter		in	3/4	3/4	3/4	3/4	3/4
Refrigerant			R-454b	R-454b	R-454b	R-454b	R-454b
Refrigerant Piping	Liquid & Gas	in	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4
DIMENSIONS AND WEIGHT							
Dimensions	W x D x H	in	14-1/2 x 21 x 18	17-1/2 x 21 x 18	14-1/2 x 21 x 18	17-1/2 x 21 x 18	14-1/2 x 21 x 23-5/16
Net Weight		lbs	42.0	42.0	42.0	42.0	57.0



A-COIL

The tubes and fins of the coil are made entirely of aluminium, which protects from the corrosive elements circulating inside the house as well as offering maximum heat transfer.

DURABLE CABINET

Galvanized steel with a polyester urethane finish, 50% more corrosion-resistant than regular finishes.

INSTALLATION

Vertical upflow, downflow or horizontal.

REFRIGERANT LEAKAGE DETECT

Indoor unit will show error code .ec. and stop automatically when refrigerant leakage is detected. This function can better protect the compressor being damaged by high temperature due to refrigerant leakage.



	2.5	2.5	3	3	4	5	5
	CEB-36MX1721	CEB-36MX2121	CEB-36MX1721	CEB-36MX2121	CEB-60MX2121	CEB-60MX2121	CEB-60MX2421
	4CDH2030C21	4CDH2030C21	4CDH2036C21	4CDH2036C21	4CDH2048C21	4CDH2060C21	4CDH2060C21
	216621490	216621491	216621492	216621493	216684081	216720951	216720952
	●	●	●	●	●	●	●
	●	●	●	●	●	●	●
	29,000	29,000	36,000	36,000	45,000	52,000	47,000
	30,000	32,000	38,000	38,000	48,000	56,000	58,000
	16.0	16.0	15.8	15.8	15.2	16.0	15.2
	9.6	9.6	9.4	9.4	8.8	8.5	8.1
	8.2	8.2	7.9	7.9	7.4	6.9	6.8
	32,000	32,000	36,000	36,000	42,000	45,000	43,000
	1.85	1.85	1.90	1.90	1.85	1.80	1.83
	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum	Hydrophilic Aluminum
	VET	VET	VET	VET	VET	VET	VET
	3/4	3/4	3/4	3/4	3/4	3/4	3/4
	R-454b	R-454b	R-454b	R-454b	R-454b	R-454b	R-454b
	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4	3/8 & 3/4
	17-1/2 x 21 x 23-1/2	21 x 21 x 24	17-1/2 x 21 x 23-1/2	21 x 21 x 24	21-5/8 x 21-1/2 x 27-3/4	21-5/8 x 21-1/2 x 27-3/4	24-1/2 x 21 x 28
	59.5	64.0	59.5	97.0	97.0	81.0	87.0

WARRANTIES

As part of our commitment to quality service, we offer a **basic limited 10-year parts and compressor warranty** and a **6-year labor warranty** on your system with the possibility to upgrade it with a **limited 4-year extended warranty on labor**.

* Contact your Canair retailer to learn how you can qualify for this extended warranty.



WI-FI WIRED CONTROLLER



- Part Number: **17317100A41107**
- Model: **KJR-120N(X6W)/BGEF V1.4**
- Wi-Fi
- Connection: HA/HB and 4-wire (X/Y/E - 5V/12V)

1 FAN SPEED

Select fan speeds: AUTO/20%/40%/60%/80%/100%

2 MODE

Scrolls through operation modes: AUTO/COOL/DRY/HEAT/FAN

3 FUNCTION

Scrolls through operation functions: Fresh/Sleep/Follow Me/AP Mode

4 SWING

Starts and stops the horizontal louver movement

5 ADJUST

Allows you to navigate through the available options

6 TIMER

Set timer to turn unit on or off

7 COPY

Allows you to copy settings

8 ON/OFF

Turns the unit on or off

9 CONFIRM

Confirms the selected functions

10 BACK

Back

11 DAY OFF/DELAY

Allows you to specify non-operating days

12 CHILD LOCK

Lock the keypad

REDUCED CARBON EMISSIONS THANKS TO THE ECO-FRIENDLY R-454B REFRIGERANT

This A2L refrigerant emits a global warming potential (GWP) of 466, which is significantly lower than that of older refrigerants. A key factor for customers concerned about their carbon footprint.



Heat pumps **made for Quebec's climate**,
with **quality products** and a warranty **tailored**
to your needs.



RIDE THE CANAIR WAVE

Our Quebec summers are getting sweatier as the years go by and it's getting increasingly difficult to relax and sleep easy at night when humidex levels trigger extreme weather notifications on our smartphones. It's time to up your indoor cooling game! Whether you're set up with a mini-split or a central air unit, a **Canair** system is designed to help you stay dry as a bone during those hot summer months. In cooling mode, a **Canair** heat pump can even find the heat inside your home, absorb it, and release it outdoors.

It doesn't even need cold air to operate.



DO THE GREEN WAVE

A **Canair** cooling system runs on electricity and produces much less harmful greenhouse gas emissions compared to conventional natural gas systems.

A better choice for the planet.



WAVES OF SAVINGS WITH CANAIR

Whether it's for a new build or a retrofit, a **Canair** system is an ideal solution to keep your home cool at optimal operational levels in the summer. In fact, if you're looking to replace an existing traditional air conditioning system, consider the very low incremental cost to make the switch.

Reduce your energy bills while keeping your household cool.



canair

Made for Quebec

canair.com

Heat pumps made for Quebec's climate.



Act to protect consumers from planned obsolescence and to promote the durability, reparability and maintenance of goods

POLICY ON THE DISTRIBUTION OF SPARE PARTS, MAINTENANCE AND REPAIR

Although we make every effort to provide our customers with access to repair services (through intermediaries holding the required certifications), to spare parts as well as to maintenance and repair information, we in no way guarantee the availability of (i) spare parts (ii) repair services, and / or (iii) information necessary for the maintenance or repair of all the goods we sell, and we are not otherwise bound to do so under the statutory warranty of availability set out in section 39 and following of the consumer protection act of Quebec.

STATUTORY WARRANTY OF GOOD WORKING ORDER*

As a manufacturer under the Consumer Protection Act for the Canair heat pump and air conditioner brand, or any other product purchased directly from a company—specifically an American company—that does not maintain a distribution center, head office, or any other type of establishment (other than a P.O. box) in Canada.

The proper operation of certain new goods is guaranteed for several years from the date of delivery (Section 38.1 et seq. of the Consumer Protection Act), by both the merchant and the manufacturer:

Goods	Duration of the statutory warranty
Air Conditioning – Heat Pump	6 years

* For legal warranty details, visit www.canair.com

YOUR RETAILER

Exclusive distributor

DESCAIR

Proud family and Quebec
owned company since 1971

Mercer Best Employer
Canada 2026

**BEST
MANAGED
COMPANIES**
Platinum
member

descair.ca — 514 744-6751 or 1 800 361-7735

canair

Made for Quebec

INVERTER TECHNOLOGY

AHRI CERTIFIED™
www.ahridirectory.org

ETL
Intertek

ne
ep

ENERGY STAR

COLD
CLIMATE V6.1